


FRESATURA STANDARD


Fresa a 2 taglienti lunga

PVD TiAlN Cer-T

Disponibili anche non rivestite

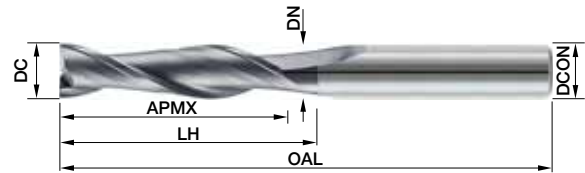

62L



Cod.		DC	APMX	LH	OAL	DCON	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,05
62L.030A	62L.030	3	18	23	60	3	2,9
62L.040A	62L.040	4	20	25	60	4	3,9
62L.050A	62L.050	5	25	29	62	5	4,9
62L.060A	62L.060	6	30	34	70	6	5,9
62L.080A	62L.080	8	35	42	79	8	7,9
62L.100A	62L.100	10	40	47	89	10	9,8
62L.120A	62L.120	12	50	55	100	12	11,8
62L.140A	62L.140	14	58	76	125	14	13,8
62L.160A	62L.160	16	58	76	125	16	15,8
62L.200A	62L.200	20	60	73	125	20	19,6

FRESATURA STANDARD


Fresa raggiata a 2 taglienti lunga

PVD TiAlN Cer-T

Disponibili anche non rivestite



62RL



Cod.		DC	APMX	LH	OAL	DCON	RE	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,02	0/-0,05
62RL.030A	62RL.030	3	18	23	60	3	1,5	2,9
62RL.040A	62RL.040	4	20	25	60	4	2	3,9
62RL.050A	62RL.050	5	25	29	62	5	2,5	4,9
62RL.060A	62RL.060	6	30	34	70	6	3	5,9
62RL.080A	62RL.080	8	35	42	79	8	4	7,9
62RL.100A	62RL.100	10	40	47	89	10	5	9,8
62RL.120A	62RL.120	12	50	55	100	12	6	11,8
62RL.140A	62RL.140	14	58	76	125	14	7	13,8
62RL.160A	62RL.160	16	58	76	125	16	8	15,8
62RL.200A	62RL.200	20	60	73	125	20	10	19,6