


## FRESATURA STANDARD


Fresa a 3 taglienti lunga

PVD TiAlN Cer-T

Disponibili anche non rivestite

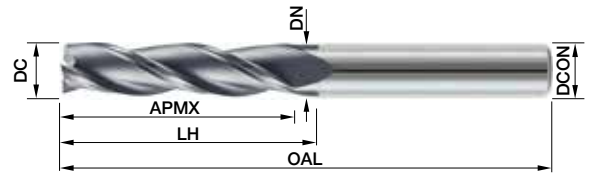

## 63L




Cod.		DC	APMX	LH	OAL	DCON	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,05
63L.030A	63L.030	3	18	23	60	3	2,9
63L.040A	63L.040	4	20	25	60	4	3,9
63L.050A	63L.050	5	25	29	62	5	4,9
63L.060A	63L.060	6	30	34	70	6	5,9
63L.080A	63L.080	8	35	42	79	8	7,9
63L.100A	63L.100	10	40	47	89	10	9,8
63L.120A	63L.120	12	50	55	100	12	11,8
63L.140A	63L.140	14	58	76	125	14	13,8
63L.160A	63L.160	16	58	76	125	16	15,8
63L.200A	63L.200	20	60	73	125	20	19,6

## FRESATURA STANDARD


Fresa raggiata a 3 taglienti lunga

PVD TiAlN Cer-T

Disponibili anche non rivestite

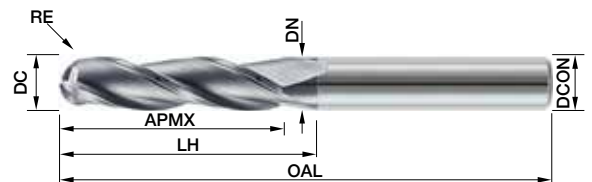

## 63RL



Cod.		DC	APMX	LH	OAL	DCON	RE	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,02	0/-0,05
63RL.030A	63RL.030	3	18	23	60	3	1,5	2,9
63RL.040A	63RL.040	4	20	25	60	4	2	3,9
63RL.050A	63RL.050	5	25	29	62	5	2,5	4,9
63RL.060A	63RL.060	6	30	34	70	6	3	5,9
63RL.080A	63RL.080	8	35	42	79	8	4	7,9
63RL.100A	63RL.100	10	40	47	89	10	5	9,8
63RL.120A	63RL.120	12	50	55	100	12	6	11,8
63RL.140A	63RL.140	14	58	76	125	14	7	13,8
63RL.160A	63RL.160	16	58	76	125	16	8	15,8
63RL.200A	63RL.200	20	60	73	125	20	10	19,6