


FRESATURA STANDARD


Fresa a 4 taglienti

PVD TiAlN Cer-T

Disponibili anche non rivestite

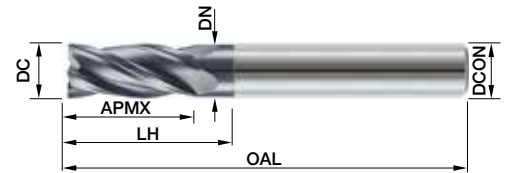

64




Cod.		DC	APMX	LH	OAL	DCON	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,05
64.020020640A	64.020020640	2	6	10	40	2	1,9
64.020060450A	64.020060450	2	4	7	50	6	1,9
64.030031040A	64.030031040	3	10	12	40	3	2,9
64.030060857A	64.030060857	3	8	11,5	57	6	2,9
64.040041140A	64.040041140	4	11	12,5	40	4	3,9
64.040061157A	64.040061157	4	11	13	57	6	3,9
64.050051350A	64.050051350	5	13	19	50	5	4,9
64.060061357A	64.060061357	6	13	19	57	6	5,9
64.060061650A	64.060061650	6	16	16	50	6	5,9
64.080081963A	64.080081963	8	19	26	63	8	7,9
64.100102272A	64.100102272	10	22	29	72	10	9,8
64.120122683A	64.120122683	12	26	37	83	12	11,8
64.140142683A	64.140142683	14	26	36	83	14	13,8
64.160163292A	64.160163292	16	32	42	92	16	15,8
64.2002038104A	64.2002038104	20	38	52	104	20	19,6
64.2502545120A	64.2502545120	25	45	63	120	25	24,6

FRESATURA STANDARD


Fresa raggiata a 4 taglienti

PVD TiAlN Cer-T

Disponibili anche non rivestite

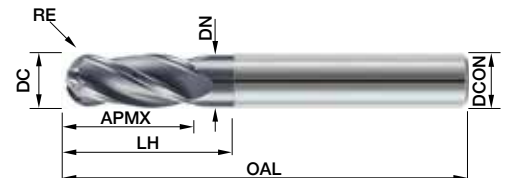

64R



Cod.		DC	APMX	LH	OAL	DCON	RE	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,02	0/-0,05
64R.020020640A	64R.020020640	2	6	6	40	2	1	1,9
64R.030031040A	64R.030031040	3	10	12	40	3	1,5	2,9
64R.030060857A	64R.030060857	3	8	11,5	57	6	2	2,9
64R.040041140A	64R.040041140	4	11	12,5	40	4	2	3,9
64R.040061157A	64R.040061157	4	11	13	57	6	2,5	3,9
64R.050051350A	64R.050051350	5	13	19	50	5	2,5	4,9
64R.060061357A	64R.060061357	6	13	19	57	6	3	5,9
64R.060061650A	64R.060061650	6	16	16	50	6	3	5,9
64R.080081963A	64R.080081963	8	19	26	63	8	4	7,9
64R.100102272A	64R.100102272	10	22	29	72	10	5	9,8
64R.120122683A	64R.120122683	12	26	37	83	12	6	11,8
64R.140142683A	64R.140142683	14	26	36	83	14	7	13,8
64R.160163292A	64R.160163292	16	32	42	92	16	8	15,8
64R.2002038104A	64R.2002038104	20	38	52	104	20	10	19,6
64R.2502545120A	64R.2502545120	25	45	63	120	25	12,5	24,6