


FRESATURA STANDARD


Fresa a 4 taglienti lunga

PVD TiAlN Cer-T

Disponibili anche non rivestite

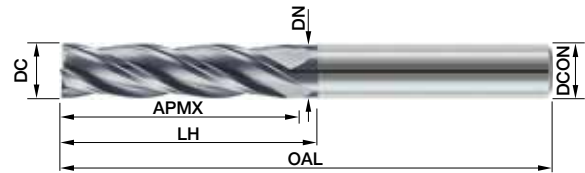

64L



Cod.		DC	APMX	LH	OAL	DCON	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,05
64L.030A	64L.030	3	18	23	60	3	2,9
64L.040A	64L.040	4	20	25	60	4	3,9
64L.050A	64L.050	5	25	27,5	62	5	4,9
64L.060A	64L.060	6	30	34	70	6	5,9
64L.080A	64L.080	8	35	42	79	8	7,9
64L.100A	64L.100	10	40	47	89	10	9,8
64L.120A	64L.120	12	50	55	100	12	11,8
64L.140A	64L.140	14	58	76	125	14	13,8
64L.160A	64L.160	16	58	76	125	16	15,8
64L.200A	64L.200	20	60	73	125	20	19,6

FRESATURA STANDARD


Fresa raggiata a 4 taglienti lunga

PVD TiAlN Cer-T

Disponibili anche non rivestite



64RL



Cod.		DC	APMX	LH	OAL	DCON	RE	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,02	0/-0,05
64RL.030A	64RL.030	3	18	23	60	3	1,5	2,9
64RL.040A	64RL.040	4	20	25	60	4	2	3,9
64RL.050A	64RL.050	5	25	27,5	62	5	2,5	4,9
64RL.060A	64RL.060	6	30	34	70	6	3	5,9
64RL.080A	64RL.080	8	35	42	79	8	4	7,9
64RL.100A	64RL.100	10	40	47	89	10	5	9,8
64RL.120A	64RL.120	12	50	55	100	12	6	11,8
64RL.140A	64RL.140	14	58	76	125	14	7	13,8
64RL.160A	64RL.160	16	58	76	125	16	8	15,8
64RL.200A	64RL.200	20	60	73	125	20	10	19,6