



FRESATURA STANDARD

Fresa a 4 taglienti extralunga

PVD TiAlN Cer-T
Disponibili anche non rivestite

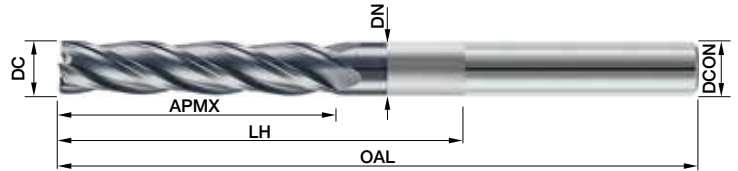

64XL




Cod.		DC	APMX	LH	OAL	DCON	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,05
64XL.030A	64XL.030	3	25	37	75	3	2,9
64XL.040A	64XL.040	4	32	39	75	4	3,9
64XL.050A	64XL.050	5	38	58	100	5	4,9
64XL.060A	64XL.060	6	40	60	100	6	5,9
64XL.080A	64XL.080	8	45	63	100	8	7,9
64XL.100A	64XL.100	10	50	75	120	10	9,8
64XL.120A	64XL.120	12	60	100	150	12	11,8
64XL.140A	64XL.140	14	75	103	150	14	13,8
64XL.160A	64XL.160	16	75	100	150	16	15,8
64XL.200A	64XL.200	20	75	98	150	20	19,6


FRESATURA STANDARD

Fresa raggiata a 4 taglienti extralunga

PVD TiAlN Cer-T
Disponibili anche non rivestite

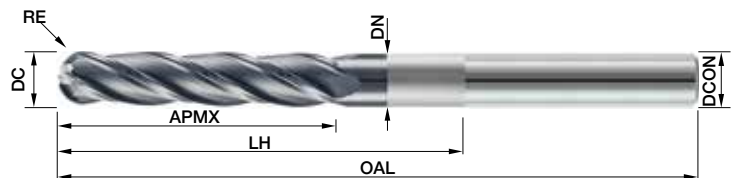

64RXL



Cod.		DC	APMX	LH	OAL	DCON	RE	DN
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,02	0/-0,05
64RXL.030A	64RXL.030	3	25	37	75	3	1,5	2,9
64RXL.040A	64RXL.040	4	32	39	75	4	2	3,9
64RXL.050A	64RXL.050	5	38	58	100	5	2,5	4,9
64RXL.060A	64RXL.060	6	40	60	100	6	3	5,9
64RXL.080A	64RXL.080	8	45	63	100	8	4	7,9
64RXL.100A	64RXL.100	10	50	75	120	10	5	9,8
64RXL.120A	64RXL.120	12	60	100	150	12	6	11,8
64RXL.140A	64RXL.140	14	75	103	150	14	7	13,8
64RXL.160A	64RXL.160	16	75	100	150	16	8	15,8
64RXL.200A	64RXL.200	20	75	98	150	20	10	19,6