

66MR


Fresatura Acciaio

FRESE PER SBAVATURA


Fresa raggiata a taglio incrociato

PVD TiAlN Cer-T

Disponibili anche non rivestite

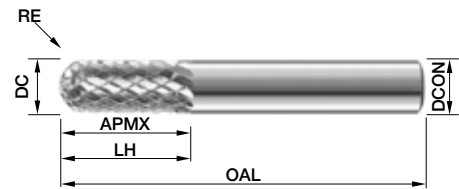

66MR



Cod.		DC	APMX	LH	OAL	DCON	RE
Rivestite	Non rivestite	h10	0/+2	0/+2	0/+2	h6	0/-0,04
66MR.030A	66MR.030	3	10	10	40	3	1,5
66MR.040A	66MR.040	4	11	11	40	4	2
66MR.050A	66MR.050	5	13	13	50	5	2,5
66MR.060A	66MR.060	6	16	16	50	6	3
66MR.080A	66MR.080	8	19	19	63	8	4
66MR.100A	66MR.100	10	22	22	72	10	5
66MR.120A	66MR.120	12	26	26	83	12	6
66MR.160A	66MR.160	16	32	32	92	16	8
66MR.180A	66MR.180	18	32	32	92	18	9
66MR.200A	66MR.200	20	38	38	104	20	10

