


FRESE RAGGIATE PER BASSORILIEVI

UTENSILE IN METALLO DURO
ATTACCO FILETTATO 1/2 GAS
PASSAGGIO INTERNO DELL'ACQUA

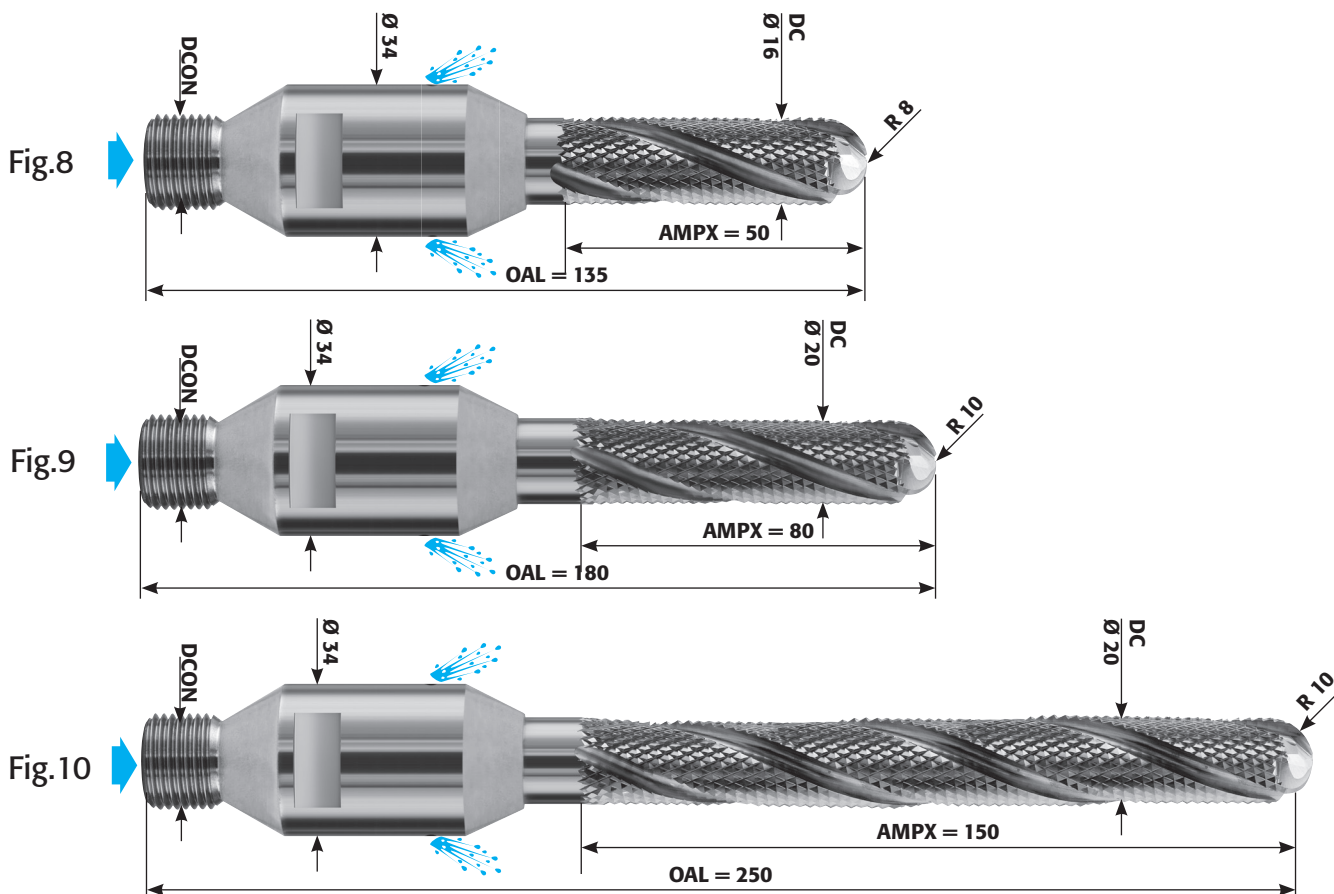


FORMA 31		DC	APMX	DCON	OAL	R
CODICE						
Fig. 8	311616/4x50x130R8	16	50	1/2 GAS	135	8
	311616/6x50x130R8	16	50	1/2 GAS	135	8
Fig. 9	312016/4x80x180R10	20	80	1/2 GAS	180	10
	312016/6x80x180R10	20	80	1/2 GAS	180	10
Fig. 10	312016/6x150x250R10 *	20	150	1/2 GAS	250	10
	312016/6x150x250R10 *	20	150	1/2 GAS	250	10

*su richiesta

Taglienti disponibili:

Per marmi duri



/4

Per marmi teneri



/6

Condizioni di Lavoro Consigliate:

PER FINITURA:

avanzamento: 200-230 mm/1'
spostamento laterale: 1-1,5 mm

PER SGROSSATURA:

avanzamento: 200-300 mm/1'
spostamento laterale: 3-5 mm