


# 642


## FRESATURA DI LEGHE DI TITANIO E NICHEL

Fresa a 4 taglienti con raggio torico

PVD Zirconio Cer-Ni

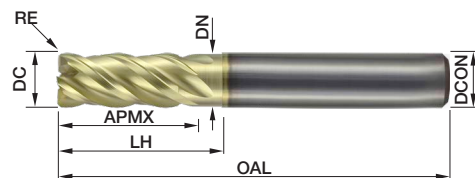

## 642

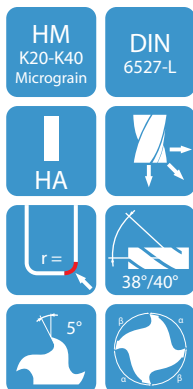

Cod.	DC	DC TOL.	APMX	LH	OAL	DCON	RE	DN
			0/+2	0/+2	0/+2	h6	0/-0,04	0/-0,05
642.030060857R030N	3	h10	8	12	57	6	0,3	2,9
642.040061157R030N	4	h10	11	15	57	6	0,3	3,8
642.050061357R030N	5	h10	13	17	57	6	0,3	4,8
642.060061357R050N	6	h10	13	19	57	6	0,5	5,7
642.060061357R100N	6	h10	13	19	57	6	1	5,7
642.060061357R150N	6	h10	13	19	57	6	1,5	5,7
642.080081963R050N	8	h10	19	25	63	8	0,5	7,7
642.080081963R100N	8	h10	19	25	63	8	1	7,7
642.080081963R150N	8	h10	19	25	63	8	1,5	7,7
642.100102272R050N	10	h10	22	30	72	10	0,5	9,7
642.100102272R100N	10	h10	22	30	72	10	1	9,7
642.100102272R150N	10	h10	22	30	72	10	1,5	9,7
642.120122683R100N	12	h10	26	34	83	12	1	11,5
642.120122683R200N	12	h10	26	34	83	12	2	11,5
642.120122683R300N	12	h10	26	34	83	12	3	11,5
642.160163292R100N	16	h10	32	47	92	16	1	15,5
642.160163292R200N	16	h10	32	47	92	16	2	15,5
642.160163292R400N	16	h10	32	47	92	16	4	15,5
642.2002038104R200N	20	h10	38	53	104	20	2	19,5
642.2002038104R300N	20	h10	38	53	104	20	3	19,5
642.2002038104R500N	20	h10	38	53	104	20	5	19,5

