



FRESATURA DI LEGHE DI TITANIO E NICHEL

Fresa a 4 taglienti con raggio torico e adduzione interna

PVD Zirconio Cer-Ni

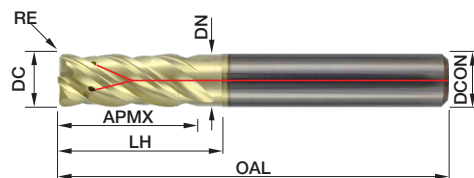

642F

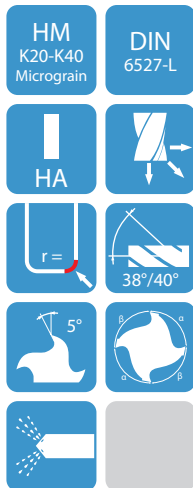

| Cod. | DC | DC TOL. | APMX | LH | OAL | DCON | RE | DN |
|----------------------|----|---------|------|------|------|------|---------|---------|
| | | | 0/+2 | 0/+2 | 0/+2 | h6 | 0/-0,04 | 0/-0,05 |
| 642F.060061357R050N | 6 | h10 | 13 | 19 | 57 | 6 | 0,5 | 5,7 |
| 642F.060061357R100N | 6 | h10 | 13 | 19 | 57 | 6 | 1 | 5,7 |
| 642F.060061357R150N | 6 | h10 | 13 | 19 | 57 | 6 | 1,5 | 5,7 |
| 642F.080081963R050N | 8 | h10 | 19 | 25 | 63 | 8 | 0,5 | 7,7 |
| 642F.080081963R100N | 8 | h10 | 19 | 25 | 63 | 8 | 1 | 7,7 |
| 642F.080081963R200N | 8 | h10 | 19 | 25 | 63 | 8 | 1,5 | 7,7 |
| 642F.100102272R050N | 10 | h10 | 22 | 30 | 72 | 10 | 0,5 | 9,7 |
| 642F.100102272R100N | 10 | h10 | 22 | 30 | 72 | 10 | 1 | 9,7 |
| 642F.100102272R250N | 10 | h10 | 22 | 30 | 72 | 10 | 1,5 | 9,7 |
| 642F.120122683R100N | 12 | h10 | 26 | 34 | 83 | 12 | 1 | 11,5 |
| 642F.120122683R200N | 12 | h10 | 26 | 34 | 83 | 12 | 2 | 11,5 |
| 642F.120122683R300N | 12 | h10 | 26 | 34 | 83 | 12 | 3 | 11,5 |
| 642F.160163292R100N | 16 | h10 | 32 | 47 | 92 | 16 | 1 | 15,5 |
| 642F.160163292R200N | 16 | h10 | 32 | 47 | 92 | 16 | 2 | 15,5 |
| 642F.160163292R400N | 16 | h10 | 32 | 47 | 92 | 16 | 4 | 15,5 |
| 642F.2002038104R200N | 20 | h10 | 38 | 53 | 104 | 20 | 2 | 19,5 |
| 642F.2002038104R300N | 20 | h10 | 38 | 53 | 104 | 20 | 3 | 19,5 |
| 642F.2002038104R500N | 20 | h10 | 38 | 53 | 104 | 20 | 5 | 19,5 |

